



AM|FM|AUX|Bluetooth®|APP READY Stereo

JWM1A



PRODUCT FEATURES

- jControl downloadable app controls the functions of your stereo
- Mechless design
- Bluetooth® (A2DP, AVRCP) for streaming audio from any Bluetooth enabled device
- AM/FM electronic tuner (US only)
- 30 programmable station presets (18FM, 12AM)
- Auto-store/preset scan
- Two-zone audio selectable via A/B switch
- Front auxilliary audio input
- 10 level user selectable dimming display
- 7 watts per channel
- 12V DC power
- Two-wire power system
- Alarm clock and sleep timer
- Cutout dimensions: 7.2"W x 1.92"H x 9.75"D
- Dimensions: 10.43"W x 2.75"H x 3.5"D


DESIGNED TO MOVE [YOU]™

asa
ELECTRONICS™
2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com



AM|FM|AUX|Bluetooth® |APP READY Stereo

JWM1A

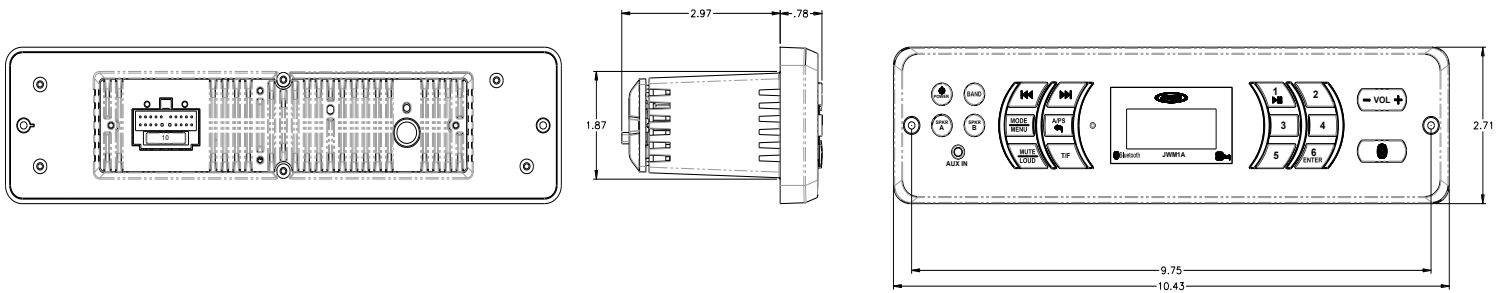

Features:

- 12V DC Power (+12V Switched and ground)
- AM/FM Electronic Tuner (US only)
- 30 Programmable Station Presets (18FM, 12AM)
- Auto-Store/Preset Scan
- Receives Bluetooth audio (A2DP) and controls (AVRCP) from BT enabled source
- Clock with Sleep Timer and Alarm
- Blue LED Backlit Controls
- 10 Level User Selectable Dimming Display
- 1 - Front Aux Audio Input (1/8" jack)
- 24W Total – 2-Zone Audio Output
- App Ready

Specifications

General Specifications

Power System	12 V DC (2-wire)	
Operating Voltage Range	10 V to 16 V	
Current Draw @ 12V	Quiescent	0 A
	Standby	20 mA
	Nominal	1 A
	Maximum	3 A
Operating Temperature Range	-4°F to 149 °F	-20°C to 65°C
Storage Temperature Range	-22°F to 158°F	-30°C to 70°C
Maximum Relative Humidity	95%	
Overall Dimensions	10-7/16" W x 2-3/4" H x 3-1/2" D	
Product Weight (unpackaged)	1.0 lb	

Performance Specifications

FM Sensitivity	5 μV
AM Sensitivity	17 μV
Maximum Output Power	4 x 6Watts Total
Total Harmonic Distortion	1%
Applied Test Suite	ASA ES0001
Regulatory Certification	FCC Part 15B